


GSM Lift Watch 4G

VOICE

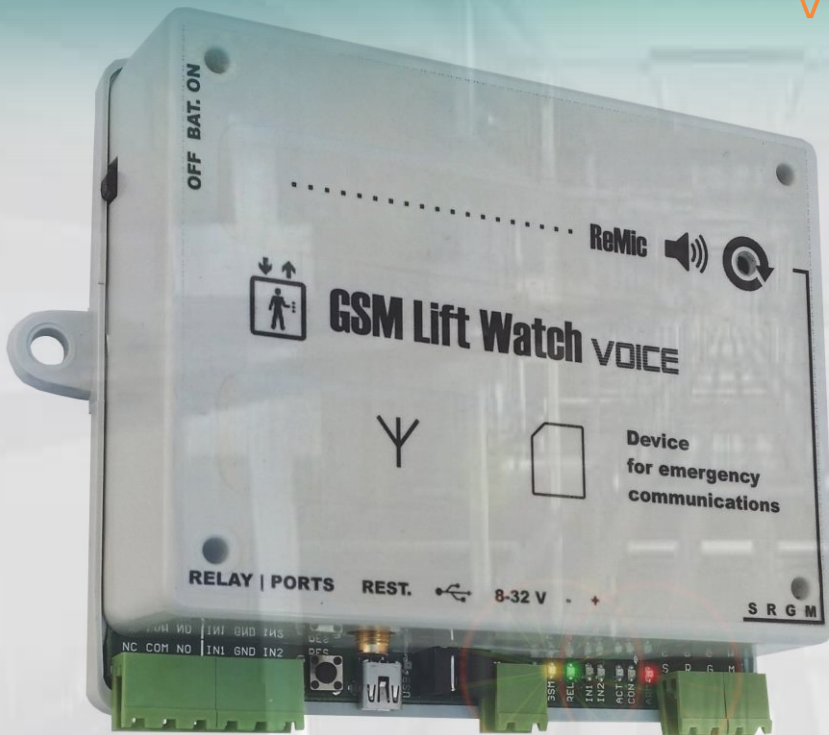

- No landline
- Easy to install
- Simple settings
- Voice messages
- Calls up to 7 numbers
- Programmable relay
- Universal input
- Blocking input
- Test of acoustic path
- Automatic periodic test
- Backup battery
- USB
- SMS

4G GSM Lift Watch Voice meets all safety standards (EN 81-28, 81-70) and will certainly satisfy your requirements.

2G / 4G (VoLTE) – Voice over LTE version

You will appreciate easy installation and setup. No worries with a landline, easy settings with a single SMS message.


Voice messages not only for activation / establishing a connection, but also for next 12 statuses, which may occur during operation.

For the full function it is not necessary to purchase any additional components (options) as some competing products. Programmable relay, inputs, testing of supply and backup battery, USB port, voice messaging module, etc. - everything is included.



Emergency communicator for each lift

ALPHAD
Tech

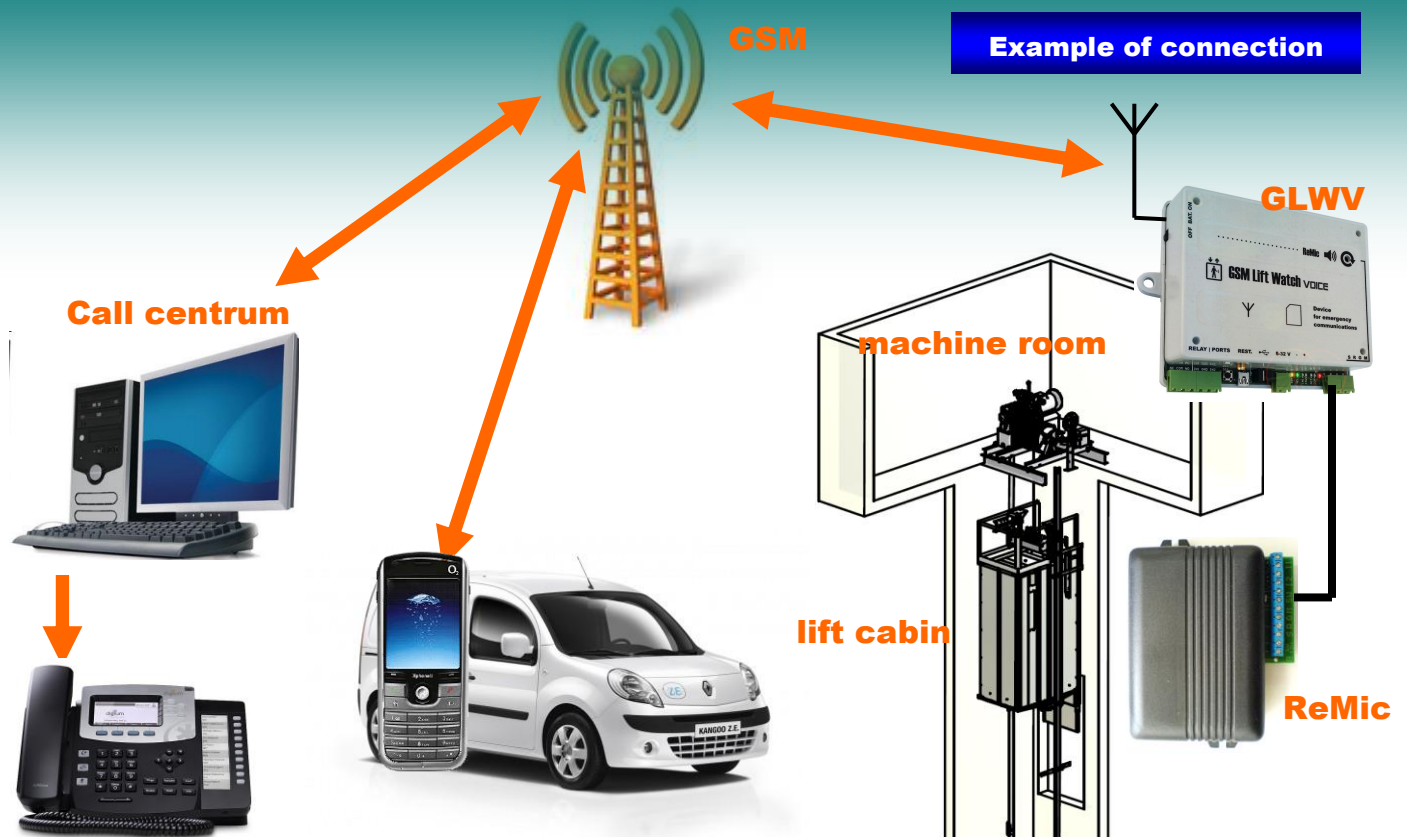

Selection from tech. parameters

Dimensions

- Basic unit 131 x 111 x 38,5 mm
- Module ReMic 110 x 78 x 52 mm (without holders)

Power supply

- Power supply 8 to 30VDC, 50 to 500mA (according to operation)
- Embedded battery Li-Ion 2000 mAh - approx 12h operation in standby mode

Inputs/outputs

- Inputs 2x – 1x blocking calls, 1x universal
- Output 1x changeover contact relay 24V/100 mA

Further parameters

- 14 programmable voice messages, each max. 8 sec.
- Programmable contents of status SMSs
- 7 programmable phone numbers for sequential dialing emergency call
- 7 programmable phone numbers for sequential dialing service call
- Working without PIN / with PIN code - automatically generate a random PIN for SIM card
- Evidence of service interventions on the elevator with the date of the last intervention

ALPHD
Tech

Alphatech Technologies s.r.o.

Jeremenkova 88, Praha 4, Czech Republic, Tel. +420 244 467 562 , sales@alphatechtechnologies.cz